





TECHNICAL DATA SHEET

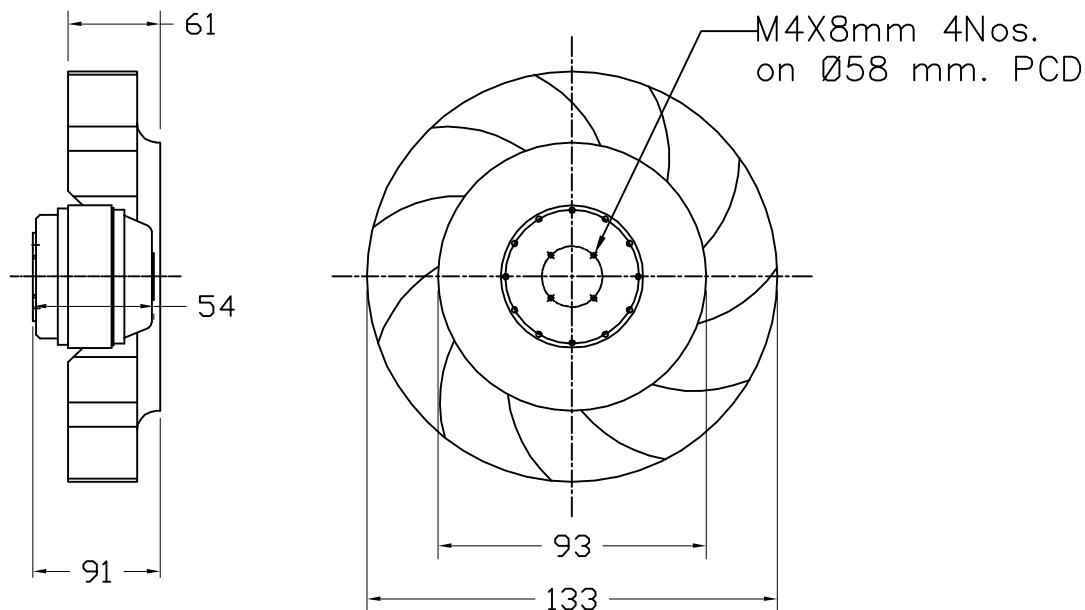

SPECIFICATION (50Hz)

Voltage (V)	230
Watt (W)	35
Amps (A)	0.16
Speed (rpm)	2600
Capacitor (μ F)	1.0
Airflow (m^3/hr)	280
Noise (dbA)	66
Net Weight (Kg)	1.5

PERFORMANCE CURVE

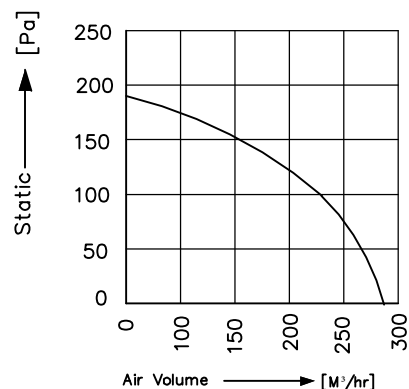

Conversion: 100pa \approx 0.4" H2O 100m³/hr \approx 60cfm

*Material :

-Impeller: Nylon6,30% Glass Filled

-Rotor: Powder coated

*Type of protection: IP44

*Insulation Class: "F"- Class

*Bearing: Maintenance free Ball Bearing.


*Permissible ambient temperature: 0 to 60° C

*High Voltage test according to IS:3588-1987

*Balancing Grade: Fans conform 6.3 Grade as recommended by IS 1940-1-2003

*Direction of rotation: Clockwise, Seen on rotor

*Wiring Diagram :




MODEL : BC23 13328

SCALE: NTS Page 1 of 1

REV/DATE: 00,15.02.2016

PREPARED BY : J.G.P

CHECKED BY : D.B.M



All information contained in this document is CONFIDENTIAL and the property of VBM. Reproduction of this any form is to be done with the specific permission of the company.

NOTE: ALL DIMENSIONS ARE IN MM.