



TECHNICAL DATA SHEET

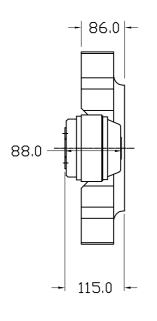


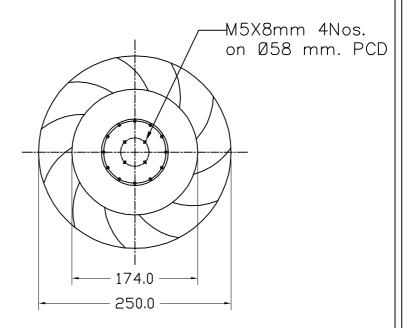

SPECIFICATION (50Hz)

Voltage (V)	230
Watt (W)	155
Amps (A)	0.70
Speed (rpm)	2500
(F) Capacitor	4.0
Airflow (m³/hr)	1200
Noise (dbA)	72
Net Weight (Kg)	2.6

PERFORMANCE CURVE

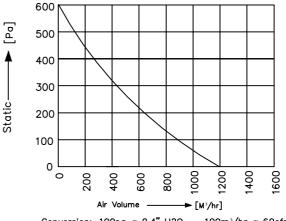

Conversion: 100pa ≈ 0.4" H20 $100m^3/hr \approx 60cfm$

*Material:

-Impeller: Nylon6,30% Glass Filled

-Rotor: Powder coated *Type of protection: IP44 *Insulation Class: "F"- Class


*Bearing: Maintenance free Ball Bearing.

*Permissible ambient temperature: 0 to 60° C *High Voltage test according to IS: 3588-1987

*Balancing Grade: Fans conform 6.3 Grade as recommended by IS 1940-1-2003

*Direction of rotation: Clockwise, Seen on rotor

*Wiring Diagram:



MODEL : BC23/250-28/S3

SCALE: NTS Page 1 of 1 REV/DATE: 00,15.02.2016

PREPARED BY : J.G.P CHECKED BY : D.B.M



NOTE: ALL DIMENSIONS ARE IN MM.

